

ReadySet® Program Options

ASSA ABLOY

Complete doorway solutions from ASSA ABLOY Group brands:

CECO | CORBIN RUSSWIN | CURRIES | EMTEK | GRAHAM | MCKINNEY
NORTON | RIXSON | SARGENT | SECURITRON | VINGCARD | YALE

The global leader in
door opening solutions

The ReadySet system is available in options to accommodate new or retrofit applications. End-users can select from a vast selection of doors and hardware from ASSA ABLOY Group brands.



All options are available with mechanical or electrified door hardware. Units with electrified hardware will have ElectroLynx® connectors for easy hookup to the power source.

Selecting and Specifying ReadySet Openings

To meet the needs of many applications, ReadySet is available with numerous products, features and functions:

- Wood doors, hollow metal doors and frames in any standard or custom color
- Mechanical or electrified hardware in a variety of finishes
- Decorative Grade 1 trim and MicroShield™ antimicrobial finish on hardware
- Much more!

For customized ReadySet openings and vertical market expertise, contact your local ASSA ABLOY Door Security Solutions sales team. In addition, specification consultants can provide code guidance and spec writing services. Visit www.assaabloydss.com to find local support.

Option 1: Door & Hardware Only

Prefinished* hollow metal or wood door with hardware from ASSA ABLOY Group brands

Applications:

Exterior or existing frames


Door:

Any hollow metal or wood door from ASSA ABLOY Group brands

Hardware:

Any door hardware from ASSA ABLOY Group brands

*Also available unfinished or primed. Details available upon request.

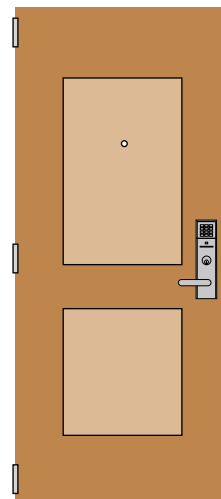

Continued on other side

Option 2: Door, Frame & Hardware

A: ReadySet® 2-Piece Frame for Most Interior Finished Walls

ReadySet 2-piece patent-pending frame with pre-hung prefinished* hollow metal or wood door and hardware from ASSA ABLOY Group brands

Applications:

Fits all applications except: double egress; cased openings; communicating frames; hospital stops; masonry applications; single rabbet; special face dimensions; special stop heights; side lites and borrowed lites (refer to Option 2 for doors and hardware only)

Frame:

Fits wall thickness from 4-3/8" to 7-5/8"

Door:

Any hollow metal or wood door from ASSA ABLOY Group brands

Hardware:

Any door hardware from ASSA ABLOY Group brands except: concealed closers that require applied stops; floor closers; top jamb mounted closers; some electric strikes

Sizes:

Single door: up to and including 4'0" x 9'0"
Double door: up to and including 8'0" x 9'0"
(pre-hardwired not pre-hung)

Performance:

Frame surpassed 3,000,000 cycles when tested to ANSI standards

Fire Rating:

90 Minute UL and WH

Windstorm Rating – Single Door:

Primary lock only = +/- 60 PSF wind load
Primary with deadlock = +/- 70 PSF wind load

B: Conventional Frame for Masonry Walls

Conventional masonry frame with pre-hung prefinished* hollow metal or wood door and hardware from ASSA ABLOY Group brands

Applications:

Interior masonry walls

Frame:


Masonry frame with existing opening anchors and expansion bolts for butted wall application

Door:

Any hollow metal or wood door from ASSA ABLOY Group brands

Hardware:

Any door hardware from ASSA ABLOY Group brands

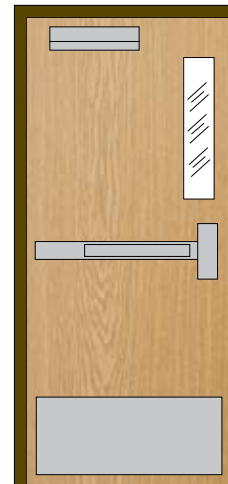

**Also available unfinished or primed. Details available upon request.*

Door Security Solutions®

110 Sargent Drive

New Haven, CT 06511

800.DSS.EZ4U (377.3948) | 203.624.5225

www.assaabloydss.com | www.readysystem.com

Hardwiring Made Easy®



All electrified openings are available with ElectroLynx® standardized plug-in connectors for doors, frames and hardware.